


E: 61850.9630(m)

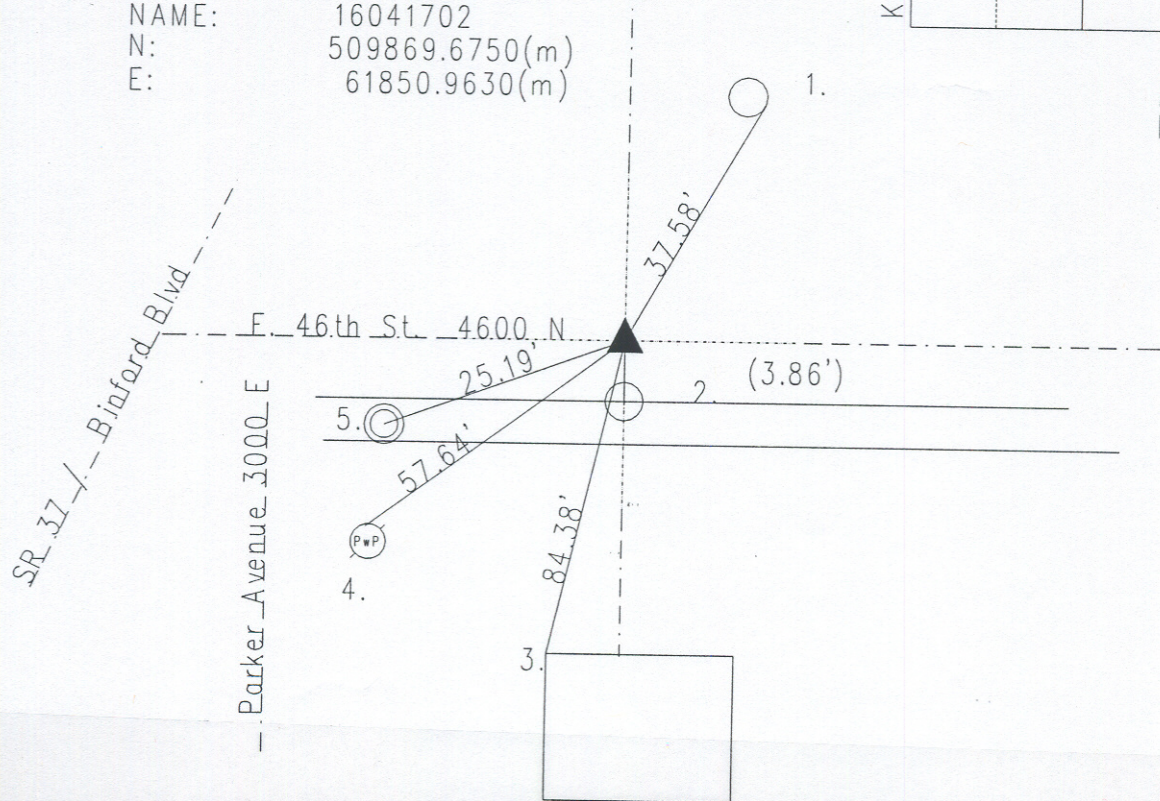

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 30" sugar bearing north 12 degrees, thence west 39 links; and a 18" beech bearing south 18 degrees, thence east 15 links. (M.C. Atlas p. 11) A survey by Chas. P. Culley on February 1, 1858 indicates no stone but a stake set with no witnesses. (Washington Legal Book p. 23) Corner referenced by Monroe on 5/7/54 and called a bolt. Corner referenced by Monroe on 11/1/60 and called a bolt. Corner referenced by Wilcoxen on 12/30/75 and called a p.k. nail. Corner referenced by Gries on 8/20/87 and called a p.k. nail with washer. Corner referenced by Kiste on 8/21/96 and called a p.k. nail with washer. Corner excavated by Wilcoxen on 6/26/99 and a #205 cast iron Harrison Monument was set in position as per ties. On 12/6/04 a 1" riser was put on an existing Harrison Monument by Wilcoxen.

Wilcoxon 1-25-05. 16041702		
REF.	DISTANCE	DESCRIPTION
1.	37.58'	Cut 'x' E side lamp post 24"up
2.	3.86'	S to N face of median
3.	84.38'	NW corner of ADDRESS 3101 stone
4.	57.64'	Large Road nail N PwP#50-370B 24"up
5.	25.19'	Cut 'x' E rim of traffic signal manhole in median